


HIPRO III TP660M

Monocrystalline Solar Module

60 Cell Series with Multi Bus-bar Cell Technology

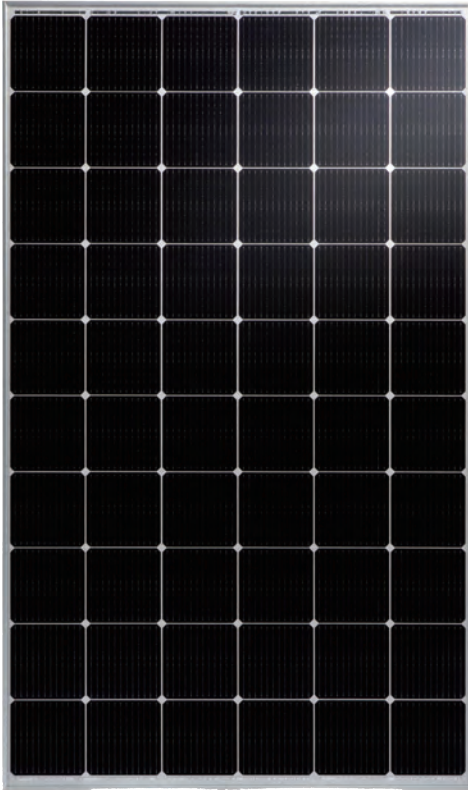

KEY FEATURES

305W

Highest power output

12 Bus-bar

Cell Technology

Anti PID

Certified by TUV Rheinland

10 years

Material & workmanship warranty

25 years

Linear power output warranty

PERC

Cell Technology

Enhanced Module Efficiency up to 18.6%

- 12 Bus-Bar grid pattern technology: reduce 3% of shading area of cell
- Lower Rs, higher power output
- Concentration effect of round photovoltaic solder strip

High Reliability and Enhance Power Output of System

- Enhanced anti micro-cracking performance with balanced interior stress
- Significantly lower the risk of hot spot by lowering module temperature in shading
- Higher power output with lower LCOE

Complete System and Product Certificates

- IEC 61215, IEC 61730, UL 1703
- ISO 9001: 2008: ISO Quality Management System
- ISO 14001: 2004: ISO Environment Mangement System
- OHSAS 18001: 2007: Occupational Health and Safety Management System



Aesthetic Appearance

- Beautiful appearance, ideal for applications that require architectural aesthetics

Robust Design

- Strong anodized aluminium alloy frame, certified to withstand up to 2400 Pa wind load and up to 5400 Pa snow load

ABOUT TALESUN

Suzhou Talesun Solar Technologies Co., Ltd. is one of the world's largest integrated PV manufacturers. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. With over 6 GW of modules installed globally, we are a leading solar energy company built upon proven product reliability and sustainable performance.

PERFORMANCE WARRANTY

Monocrystalline Solar Cell Modules

- a) During the first year, TALESUN guarantees the nominal power output of the product will be no less than 97% of the labeled power output.
- b) From year 2 to year 24, the nominal power decline will be no more than 0.7% in each year; by the end of year 25, the nominal power output will be no less than 80% of the labeled power output.

